

9455

PIN TYPE LEAD

INSTRUCTION MANUAL


Introduction

Thank you for purchasing the HIOKI "9455 PIN TYPE LEAD."
To obtain maximum performance from the product, please read this manual first, and keep it handy for future reference.

Inspection

When you receive the product, inspect it carefully to ensure that no damage occurred during shipping. If damage is evident, or if it fails to operate according to the specifications, contact your dealer or Hioki representative.

Safety Notes



Mishandling this product during use could result in injury or death, as well as damage to the product. Be certain that you understand the instructions and precautions in the manual before use. We disclaim any responsibility for accidents or injuries not resulting directly from product defects.

Safety symbols

	<p>In the manual, this mark indicates explanations which it is particularly important that the user read before using the equipment.</p>
	<p>Indicates DC (Direct Current).</p>

The following symbols are used in this Instruction Manual to indicate the relative importance of cautions and warnings.

	<p>Indicates that incorrect operation presents extreme danger of accident resulting in death or serious injury to the user.</p>
	<p>Indicates that incorrect operation presents significant danger of accident resulting in death or serious injury to the user.</p>
	<p>Indicates that incorrect operation presents possibility of injury to the user or damage to the equipment.</p>

Notes on Use

In order to ensure safe operation and to obtain maximum performance from the unit, observe the cautions listed below.

 DANGER

Do not use these leads on a circuit with a voltage exceeding the maximum input voltage of the tester to which they are connected. In any event, do not use on a circuit exceeding 60 V DC. There is a danger of electric shock.

 CAUTION


- **The ends of the 9455 PIN TYPE LEAD are sharp. Be careful to avoid injury.**
 - **Before using the leads, make sure that the insulation on the leads is undamaged and that no bare conductors are improperly exposed. Using the product under such conditions could result in electrocution. Replace the leads with the specified 9455 PIN TYPE LEAD.**
-

1. Overview

1.1 Product Overview

The ends of the 9455 PIN TYPE LEAD have an extremely fine four-electrode construction, developed for testing for raised leads on mounted ICs. They can therefore be used for accurate measurement of resistance on small-dimensioned items.


1.2 Names of Parts

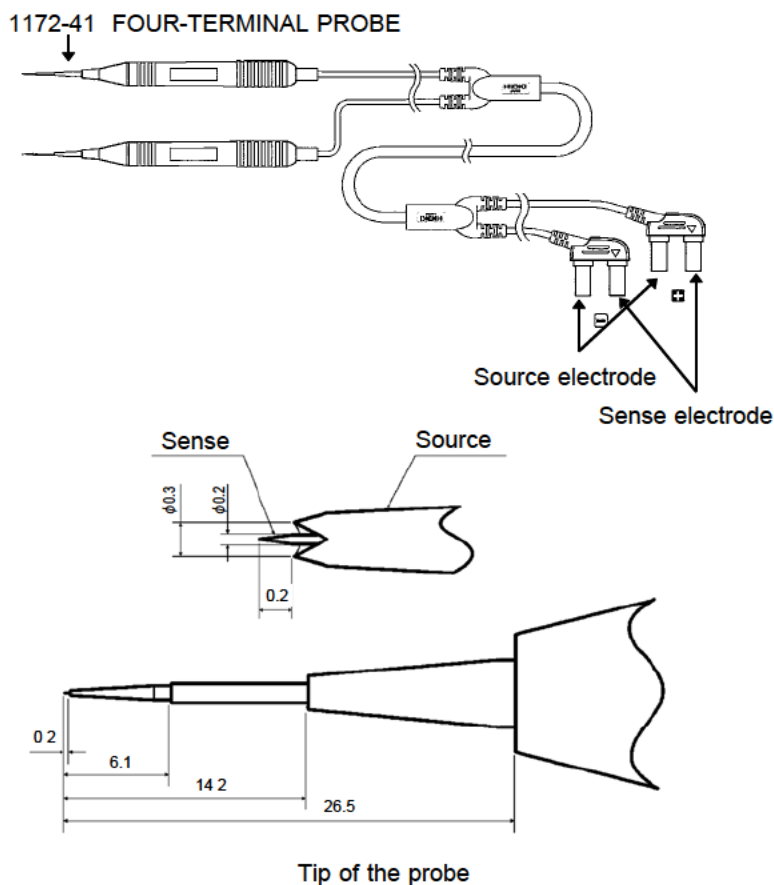

2. Method of Measurement

Connect the leads correctly to the tester. For details, refer to the instructions supplied with the tester.

For testers with zero adjustment, carry out the zero adjustment with the standard leads connected, then remove the standard leads and connect these leads to carry out measurement.

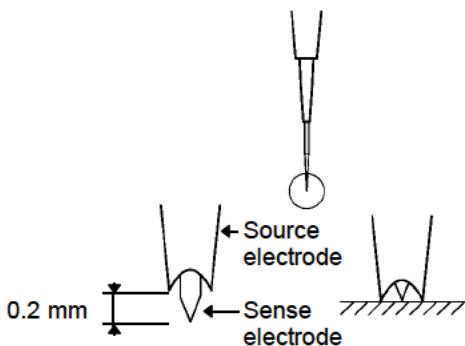


Hold these leads lightly against the two sides of the item to be tested.


After the sense electrode contacts the item, pushing the probe in by another 0.2 mm brings the source electrode into contact, and allows measurement to start.

CAUTION

- These leads are a precision instrument. Take all reasonable care in handling them.
- Treat the tips of the probes carefully; do not press them too hard against the item being tested or anything else. Because of the precision construction, this could cause the tips to break or bend.
- Hold the probes perpendicularly against the tested item. If pressed at an angle, scraped off material may prevent the four-terminal function from operating correctly.




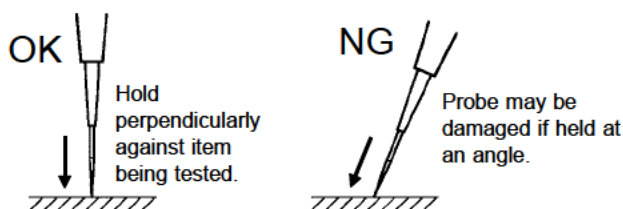


- While the probe is pressed against an item being tested, do not move it sideways, as this may result in a broken tip. Take particular care when using the 9466 REMOTE CONTROL SWITCH.

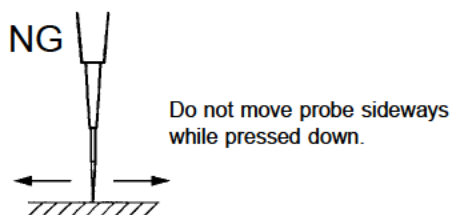


- There are two movable parts on the pin tips. Measurement uses a stroke of 0.2 mm.
- After use, protect the probe tips with the plastic caps.

3. Maintenance and Repair

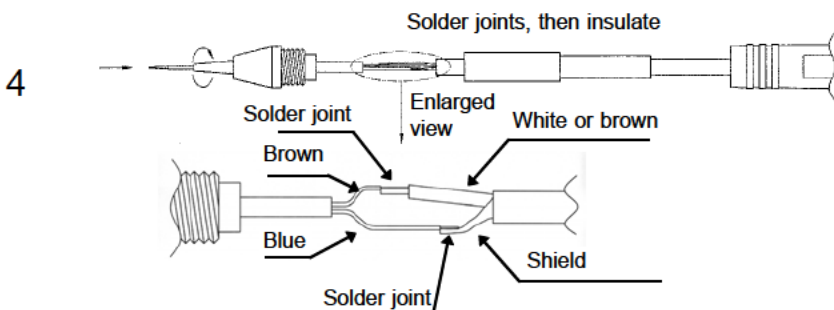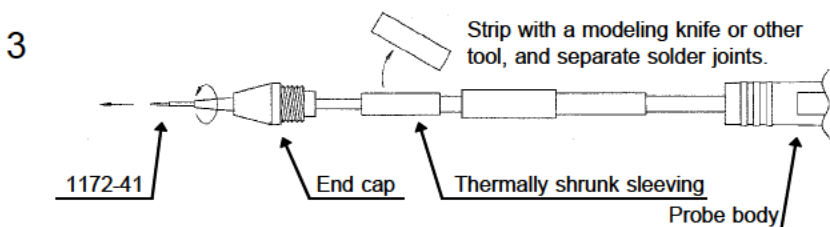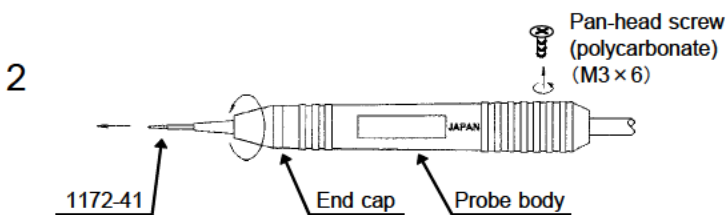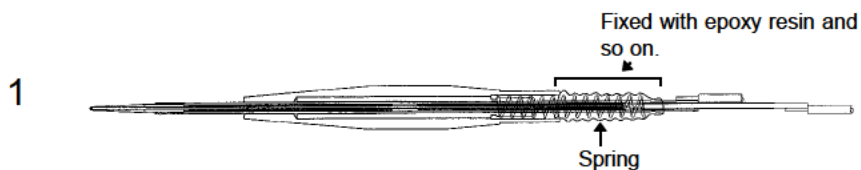

5

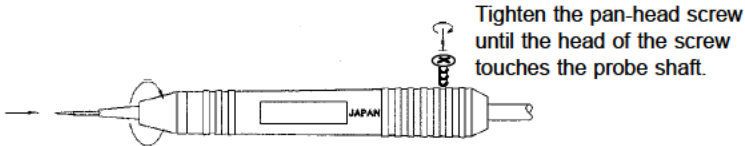

If the probe tips break, you can replace them by obtaining a 1172-41 FOUR-TERMINAL PROBE set.

1. Fix the part of the spring of the 1172-41 FOUR-TERMINAL PROBE with epoxy resin and so on.
It is to make it elastic only by 1 step by this lead though 1172-41 is elastic by 2 steps.
2. Remove the pan-head screw (polycarbonate) (M3 × 6) from the probe body, then remove the end cap.
3. Remove the thermally shrunk sleeving, and separate the two soldered joints. Take care not to damage the inner conductor. Remove the 1172-41 FOUR-TERMINAL PROBE from the end cap.
4. First pass the leads through the probe body, then join the unit consisting of the 1172-41 FOUR-TERMINAL PROBE and end cap by soldering the two leads. The solder joints should be offset, to reduce the possibility of a short-circuit. Finally, reinforce the soldered portions with insulating tape or similar, to prevent short-circuits.
5. Reassemble the 1172-41 FOUR-TERMINAL PROBE, end cap, and probe body, and finally fix the leads with the pan-head screw. Tighten the pan-head screw until the head of the screw touches the probe shaft. Do not overtighten - doing so will tear the screw thread. Refer to the "Names of parts" diagram, and check the connectivity of the banana plugs and probe tips using a tester connectivity function.

HIOKI 9455 PIN TYPE LEAD

Instruction Manual

Publication date: April 2003 Revised edition 3

Edited and published by HIOKI E.E. CORPORATION
Technical Support Section

All inquiries to International Sales and Marketing Department
81 Koizumi, Ueda, Nagano, 386-1192, Japan
TEL: +81-268-28-0562 / FAX: +81-268-28-0568
E-mail: os-com@hioki.co.jp
URL <http://www.hioki.co.jp/>

Printed in Japan 9455A980-03

-
-
- All reasonable care has been taken in the production of this manual, but if you find any points which are unclear or in error, please contact your supplier or the International Sales and Marketing Department at HIOKI headquarters.
 - In the interests of product development, the contents of this manual are subject to revision without prior notice.
 - Unauthorized reproduction or copying of this manual is prohibited.
-
-

HIOKI

HIOKI E. E. CORPORATION

HEAD OFFICE

81 Koizumi, Ueda, Nagano 386-1192, Japan
TEL +81-268-28-0562 / FAX +81-268-28-0568
E-mail: os-com@hioki.co.jp / URL <http://www.hioki.co.jp/>

HIOKI USA CORPORATION

6 Corporate Drive, Cranbury, NJ 08512, USA
TEL +1-609-409-9109 / FAX +1-609-409-9108

9455A980-03 03-04H



Printed on recycled paper



本 社 TEL0268-28-0555 FAX0268-28-0559
〒386-1192 上田市小泉 81
URL <http://www.hioki.co.jp/>

東 北 (営) TEL022-288-1931 FAX022-288-1934
〒984-0011 仙台市若林区六丁の目西町 8-1 斎喜センタービル 2F

長 野 (営) TEL0268-28-0561 FAX0268-28-0569
〒386-1192 上田市小泉 81

東 京 (営) TEL03-5835-2851 FAX03-5835-2852
〒101-0032 千代田区岩本町 2-3-3 友泉岩本町ビル 1F

特 販 課 TEL03-5835-2855 FAX03-5835-2856
〒101-0032 千代田区岩本町 2-3-3 友泉岩本町ビル 1F

北関東(営) TEL048-266-8161 FAX048-269-3842
〒333-0847 川口市芝中田 2-23-24 日置ビル

神奈川(営) TEL046-224-8211 FAX046-224-8992
〒243-0016 厚木市田村町 8-8 柳田ビル 5F

静 岡 (営) TEL054-254-4166 FAX054-254-3160
〒420-0054 静岡市南安倍 1-3-10 山善ビル 7F

名古屋(営) TEL052-702-6807 FAX052-702-6943
〒465-0081 名古屋市名東区高間町 22

大 阪 (営) TEL06-6871-0088 FAX06-6871-0025
〒560-0085 豊中市上新田 2-13-7

広 島 (営) TEL082-879-2251 FAX082-879-2253
〒731-0122 広島市安佐南区中筋 3-28-13 中筋駅前ビル 3F

福 岡 (営) TEL092-482-3271 FAX092-482-3275
〒812-0006 福岡市博多区上牟田 3-8-19 みなみビル 1F

■修理・校正業務のご用命は弊社まで・・・ISO / IEC 17025 認証取得

日置エンジニアリングサービス株式会社

〒386-1192 上田市小泉 81
TEL0268-28-0823 FAX0268-28-0824



※お問い合わせは最寄りの営業所または本社販売企画課まで。
945A980-03 03-04H



この取扱説明書は再生紙を使用しています。